

DS-KAB670-WB
Peripheral Module

- Supports call function
- Supports controlling door by keyfob
- Applicable with DS-K1T670 series



▪ Specification

Network	
Wireless Network	433 MHz
General	
Button	Press the button to call
Working temperature	-30 °C to 60 °C (-22 °C to 140 °F)
Dimensions	110.5 mm × 23.7 mm × 47.7 mm (4.35" × 0.93" × 1.88")
Working humidity	0 to 90% (no condensing)
Protective level	IP65
Anti-corrosion	48 H (about 2 years)

▪ Available Model

DS-KAB670-WB

▪ Dimension

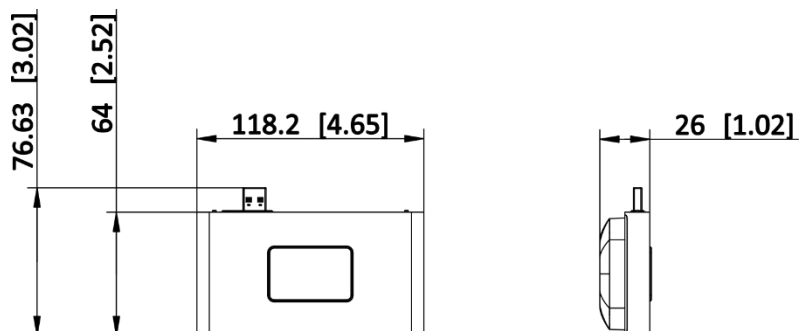

▪ Accessory

▪ Optional

DS-PC2002-WBCKV

Wireless Keyfob



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq